


387509

INSTALLATION INSTRUCTIONS

1. When using this spool as a service replacement on models which have an aluminum spool, the original lower bushing and spring retainer are not used.
2. This spool uses a slightly shorter starter rope. Cut rope to 51-3/4" (131.5 Cm).

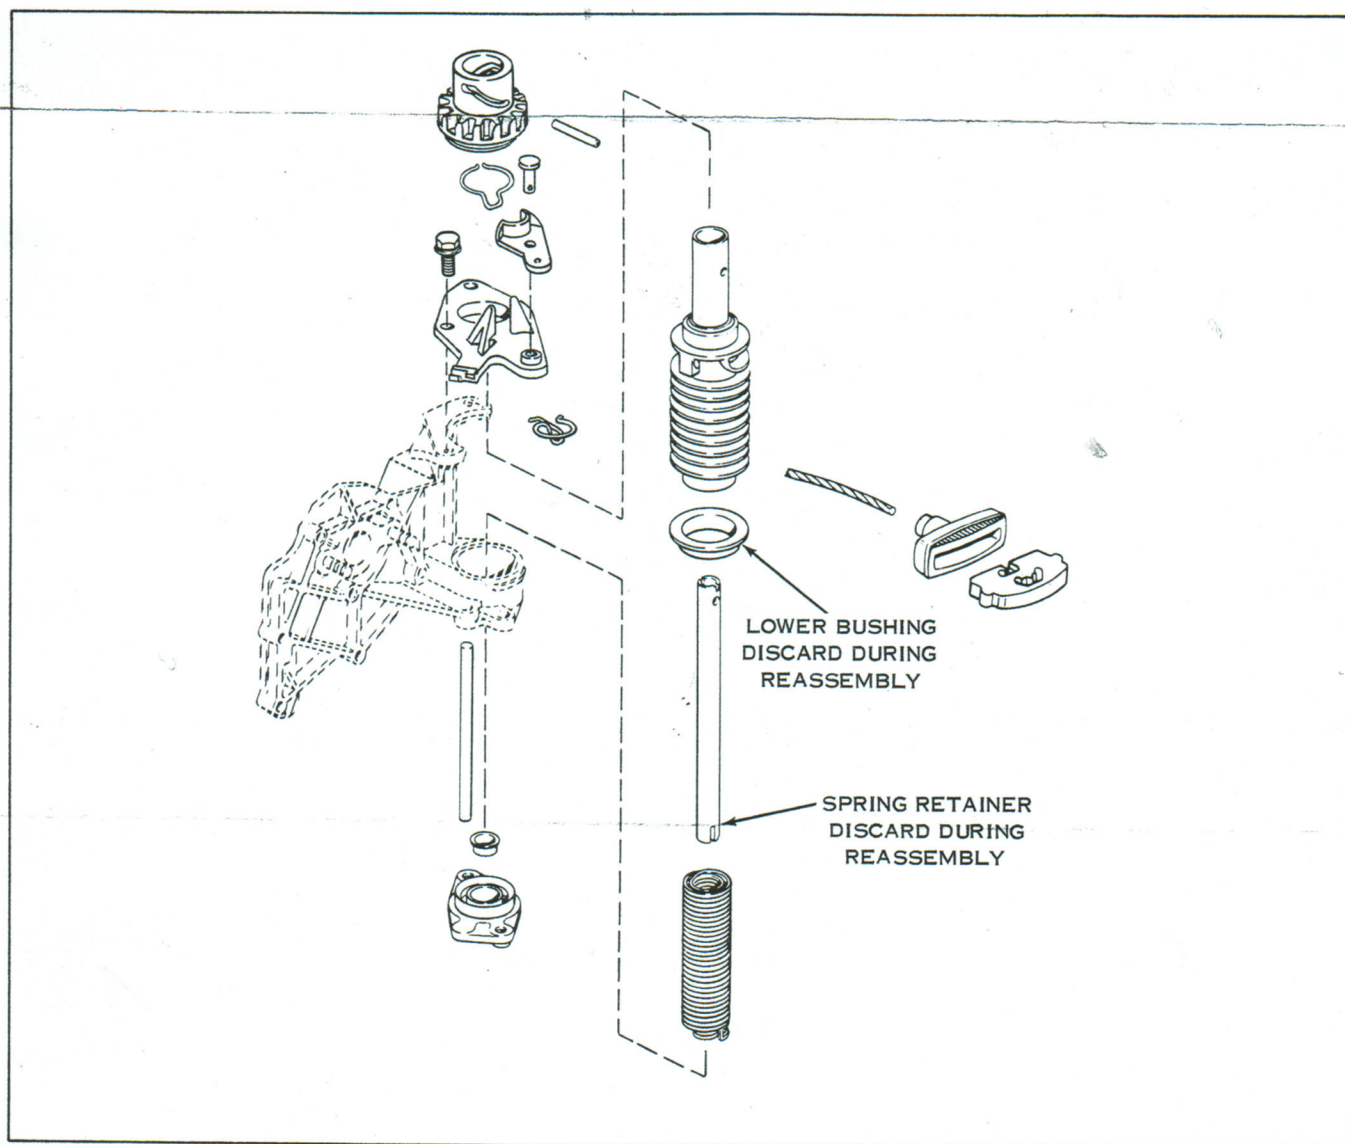

OUTBOARD MARINE CORPORATION
Waukegan, Illinois

© OUTBOARD MARINE CORPORATION 1978 ALL RIGHTS RESERVED